


# T2 Merope

## Technical Specifications and Frequency Response



Model	T2 Merope
Description	Floorstanding speaker
Speaker System	2 way system
Enclosure Type	Bass Reflex, Front Vented
<b>Shielded Components</b>	
Tweeter	25mm (1") Silk Dome
Midrange	
Woofer	130mm (5 1/4") PP Cone
<b>Freq. Response @ ±3dB</b>	
on reference axis	43 - 25k Hz
on 30° axis	43 - 16k Hz
Crossover frequency	1.48 kHz
Slope	6 / 6 dB oct
<b>Power handling</b>	
on unclipped program	90W @ 8Ω
Recommended Amplifier	10-90W @ 8Ω
Sensitivity (2.83V/1m)	87,5 dB
Nominal Impedance	8 Ω
Minimum Impedance	8,1 Ω @ 260 Hz
Net Weight	11,1 kg
Shipping Weight	13,6 kg
Dimensions	175 x 832 x 210 mm
(H x W x D)	6"15/16 x 32"3/4 x 8"15/16
Shipping Dimensions	37,5 x 38 x 112 cm
(H x W x D)	14,8"x 15"x 22"
Finishes	Black/Silver Grille Cloth
Top/Base finishes	Wood / Black

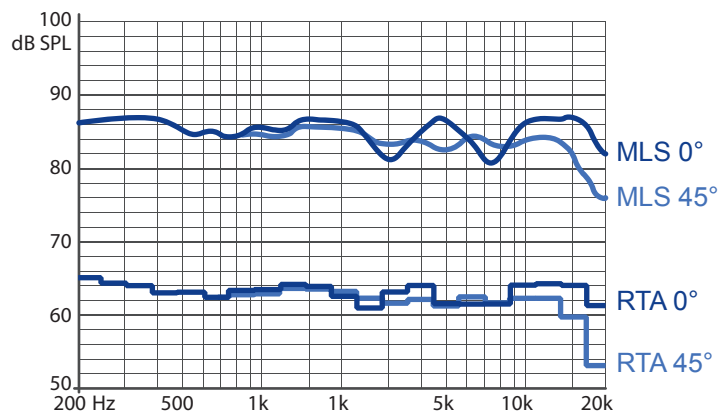

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

*Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.*

