


ASTRI  
2008

# T3 Sterope

Technical Specifications and Frequency Response



<b>Model</b>	<b>T3 Sterope</b>
<b>Description</b>	Floorstanding speaker
<b>Speaker System</b>	2 way system
<b>Enclosure Type</b>	Series Double Reflex, Front Vented
<b>Shielded Components</b>	
<b>Tweeter</b>	25mm (1") Silk Dome
<b>Midrange</b>	
<b>Woofer</b>	130mm (5 1/4") PP Cone
<b>Freq. Response @ ±3dB</b>	
<b>on reference axis</b>	46 - 25k Hz
<b>on 30° axis</b>	46 - 16k Hz
<b>Crossover frequency</b>	1.48 kHz
<b>Slope</b>	6 / 6 dB oct
<b>Power handling</b>	
<b>on unclipped program</b>	100W @ 8Ω
<b>Recommended Amplifier</b>	10-100W @ 8Ω
<b>Sensitivity (2.83V/1m)</b>	88 dB
<b>Nominal Impedance</b>	8 Ω
<b>Minimum Impedance</b>	7,5 Ω @ 240 Hz
<b>Net Weight</b>	13,6 kg
<b>Shipping Weight</b>	16,1 kg
<b>Dimensions</b>	175 x 1022 x 210 mm
<b>(H x W x D)</b>	6"15/16 x 40"1/4 x 8"15/16
<b>Shipping Dimensions</b>	37,5 x 38 x 112 cm
<b>(H x W x D)</b>	14,8"x 15"x 22"
<b>Finishes</b>	Black/Silver Grille Cloth
<b>Top/Base finishes</b>	Wood / Black

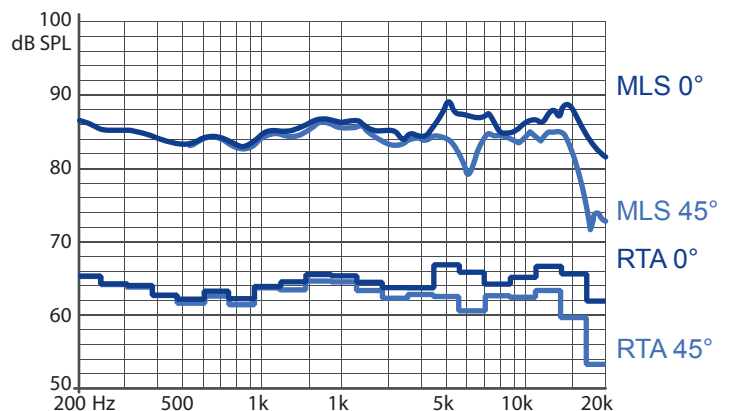

La risposta in frequenza è dichiarata a partire da 200Hz in quanto riteniamo che la risposta stessa venga influenzata in modo determinante dall'ambiente in cui sono posizionati i diffusori.

*Frequency response is shown from 200Hz because the listenign room could have a big influence on the response of the loudspeakers.*

